

# SCORPIUS GO 410 REVERSE

Our entry-level Scorpius GO 410 Reverse is easy to use. It is lighter in weight than the original Scorpius work light. Useful in construction, forestry, agriculture, and material handling, the Scorpius GO product family has a square form factor and pedestal mounting. The Scorpius GO 410 Reverse produces zero emissions (EMC CISPR 25 class 5) and its light output is 1000 lumens.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

## TECHNICAL DATA

Theoretical Lumens Output	1900 lm	Vibration	8Grms 24-2000Hz
Operational Lumens Output	1200 lm	Lens	PC
Colour Temperature	5000 K	Body / Housing	Aluminum
Nominal Voltage DC	12 - 24 V 36 - 48 V	Weight	0.5 kg
Input Voltage DC	9 - 16 V 18 - 32 V 30 - 64 V	IP Rating	IP68, IP6K9K
Power Consumption	16 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	24V=0.6A, 12V=1.1A, 36-48=0.38A	EMC	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2, R10
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M8 / M10	Electronics	Isolated
Shock	60G	Part Numbers	Reverse: 988-503B

## CONNECTORS



Built-in Deutsch DT-2 (2-pin)


---

## KEY FEATURES

- Reverse light (ECE R23)
- Operational lumens output: 1200lm
- Pure performance in a compact design

## LIGHT PATTERNS

### Scorpius GO 410 R, 1200lm Reverse

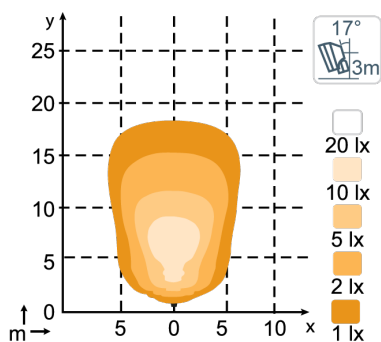

## DRAWINGS

---

