

SCORPIUS N4408

NORDIC LIGHTS® Scorpius N4408 work light offers a sharp pencil beam and two other light pattern options: high beam and Glare-Free. This LED work light has a long lifetime and high operational safety with minimum maintenance. The Scorpius N4408 is suitable for harsh conditions and a wide range of applications.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	5600 lm	Vibration	15.3Grms 24-2000Hz
Operational Lumens Output	3500 lm	Lens	PC / Glass
Colour Temperature	5700 K	Body / Housing	Aluminum
Nominal Voltage DC	12 - 24 V	Weight	1.1 kg
Input Voltage DC	9 - 32 V	IP Rating	IP68, IP6K9K, SAE J1455
Power Consumption	55 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	24V=2.2A, 12V=4.6A	EMC	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M10	Part Numbers	Glare-Free: 984-525B, High Beam: 984-500, Pencil Beam: 984-501
Shock	60G		

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES


- Vibration and shock resistant
- Operational lumens output: 3500lm
- For harsh conditions

LIGHT PATTERNS


N4407 QD, N4408, 3500lm
Pencil Beam

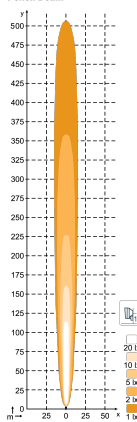

N4407 QD, N4408, 3500lm
High Beam

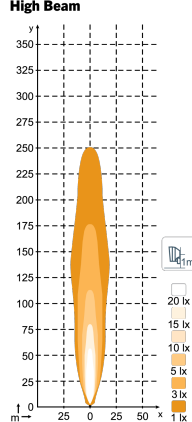

N4407 QD, N4408, 3500lm
Glare-Free

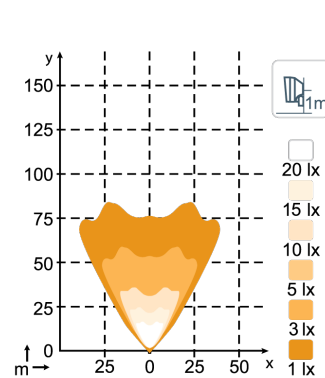

DRAWINGS

